


Electric Strikes

ABLOY HES9600



Components

Access to the Abloy HES9600 strike can be digitized with the Teleporte keyless technology by integrating the AX5 lock controller.

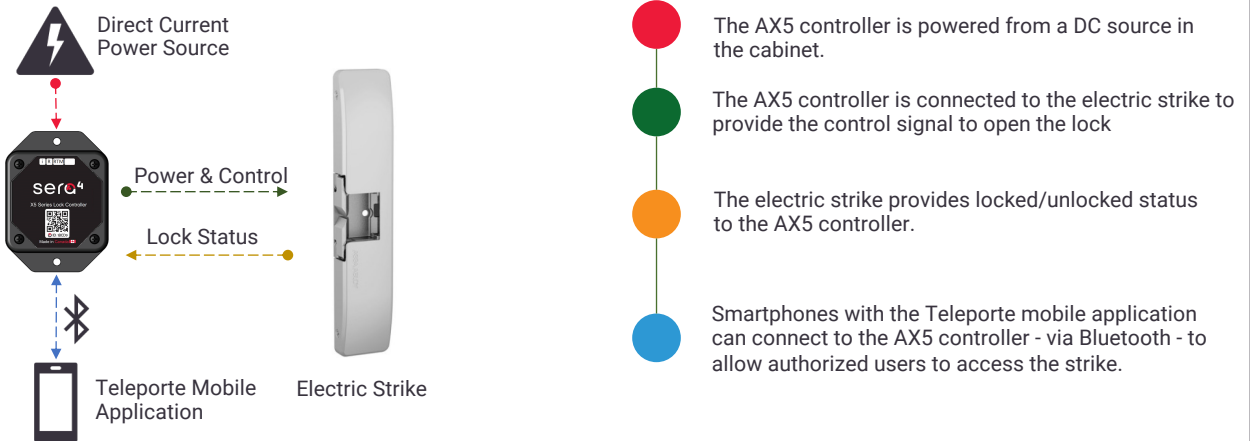

Power Requirements

There are two options to power the controller:

- Option 1 [Red Cable]: 18VDC to 60VDC
- Option 2: [Black Cable]: 12VDC

An AC to DC converter is required if there is only AC power available.

Installation

The X-Series controller can be secured by using two 3/16" screws. Refer to the installation manual the [support portal](#) for more details or email us at support@sera4.com.

Installation information for the HES9600 electric strike can be found [here](#).

Wiring

The cable hardness that comes with the AX5 controller has eight color coded cable jackets, each of them with two inner wires. The diagram below uses this color coding to show the wiring configuration between the controller and the Abloy HES9600 strike. Sera4 also provides magnetic door contacts to monitor the open/close status of the door.

